PARTS LIST FOR SANSUI SPEAKER SYSTEM

SP-X6000

Ref No. USP-11

SP-X6000

Sansui

Front View

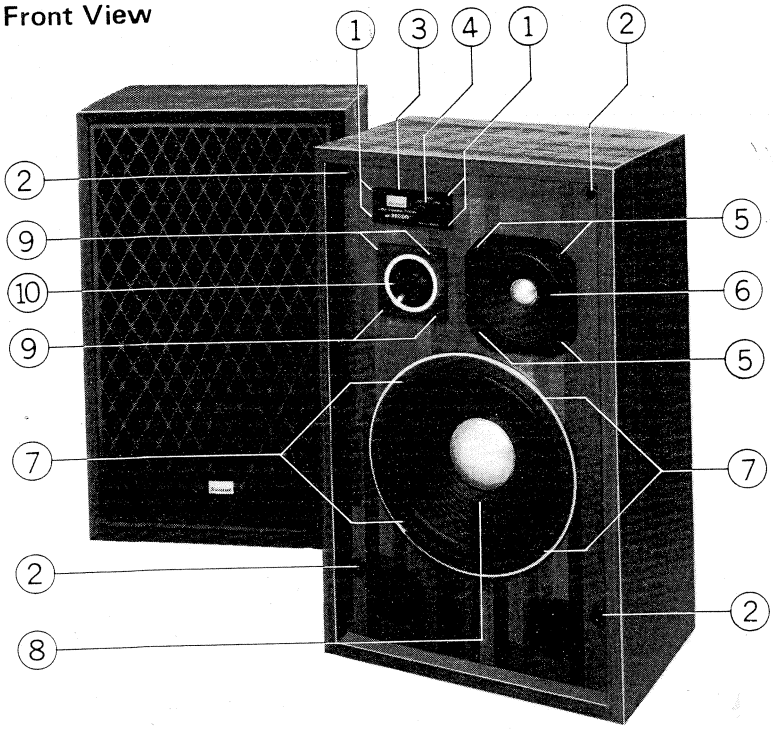

Parts List <Front View>

Parts No.	Stock No.	Description
1	5164150	Screw, M3.1 x 16 mm for installing name plate
2	5294230	Latch
3	5365520	Name Plate
4	5314080	Knob for sound balance control
5	5108930	Screw, M4 x 25mm, for mounting midrange speaker, S-141
	5120561	Washer
6	4420560	S-141, Cone-type Midrange Speaker
7	5108930	Screw, M4 x 25mm, for mounting woofer, W-174
	5120561	Washer
8	4411000	W-174, Cone-type Woofer
9	5108930	Screw, M4 x 25mm, for mounting tweeter, T-157
10	4430680	T-157, Horn-type Tweeter
11	7180510	Front Grille Ass'y
12	5294220	Strike
13	5294060	Support for strike
14	5143818	Screw, M2.7 x 13mm, for mounting the support
15	5334540	Sansui Badge on front surface of the grille
16	5174030	Push-nut for installing the badge
17	5344930	Grille Cloth
	7580940	Completed Frequency Dividing Network, N-176

Front Grille Ass'y (11)

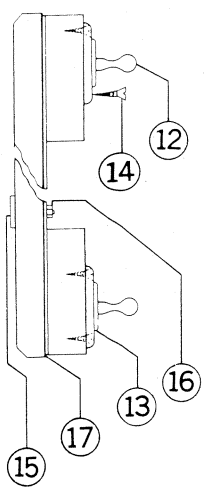

Packings

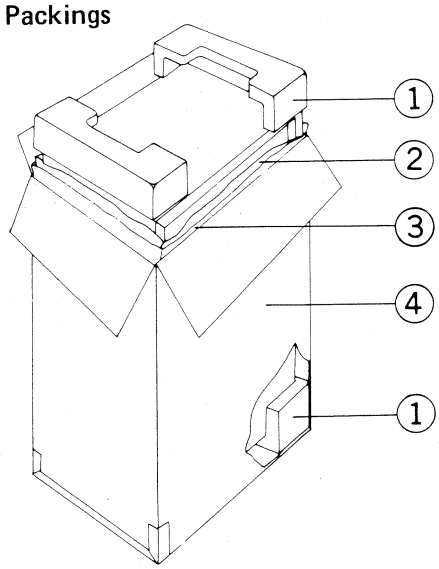

Parts List <Packings>

Parts No.	Stock No.	Description
1	9024360	Stylofoam Packing (ea)
2	9114800	Inner Bag
3	9114850	Vinyl Bag
4	9005520	Carton Box
	3834100	Speaker Cord (ea)
	9203230	A Copy of Operating Instruction Sheet
	9290110	A List of Sansui Authorized Service Center
	9290081	Note for Limited Warranty Sansui International
		Caution Card

-X6000

Frequency Dividing Network

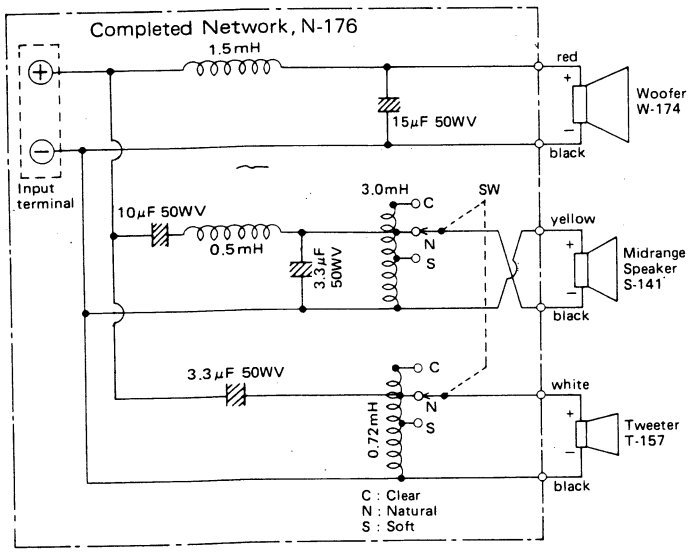

Note: Please order completed frequency dividing network, N-176, if you are in need of the following part(s) of the network.

15μF 50WV
10μF 50WV } Capacitor
3.3μF 50WV

3.0mH
0.72mH } Coil
1.5mH
0.5mH

Rotary Switch
Input terminal

Specifications

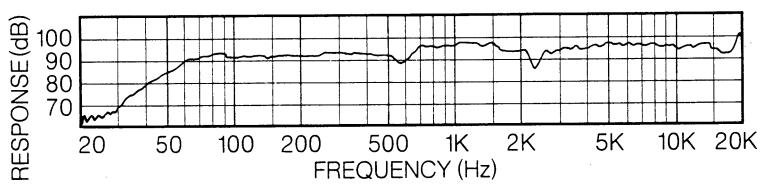

Speakers

Woofer	255mm (10") Cone-type x 1 (W-174)
Midrange	130mm x 1 (5-1/8") Cone-type x 1 (S-141)
Tweeter	60mm (2-3/8") Horn-type x 1 (T-157)
Maximum input power	100 watts
Impedance	8 ohms
Sensitivity	95dB/W (at 1m)
Frequency range	40 to 23,000Hz (in anechoic chamber) 30 to 23,000Hz (in normal listening room)
Crossover frequencies	1,500Hz, 6,000Hz
Enclosure	Bass reflex type Walnut grain vinyl finish
Dimensions	389mm (15-5/16") W 639mm (21-1/4") H 280mm (11-1/16") D
Weight	15.3kg (33.7 lbs) net 17.4kg (38.4 lbs) packed

Design and specifications subject to change without notice for improvements.

Printed in Japan (O7520M)